

Model Flex916: Fits most tubs 14"-16" high

Length of flexible tubing = 16"

Model Flex924: Fits most tubs to 24" high

Length of flexible tubing = 24"



PRESFLO® (PF) Foot Actuated (FA) only







Easily remove membrane after test



Snap-on overflow plate. No screws

See price list for complete item numbers and available options.

When ordering, please specify complete item number and any applicable option codes.

For more information, contact:

WATCO

WATCO Manufacturing Company

1220 South Powell Road Independence, MO 64057-2724 Ph. 816-796-3900 • 800-821-8576 Fax 816-796-0875 • 800-399-2826 www.watcomfg.com

Flexible

Flex900 Innovator® Models Flex916 / Flex924

Flexible tubing in place of the rigid PVC overflow pipe allows the overflow tubing to easily bend over from a misaligned drain pipe to the overflow hole of the tub.

SPECIFICATIONS

FEATURES:

- Eliminates the need to use 45° elbows for offsets. Just bend the flexible tubing to correct the misalignment.
- Eliminates all screws and a separate overflow test plug
- · Eliminates leaks due to loose overflow attachment
- Eliminates dual inventory of one- and two-hole overflow plates
- Overflow elbow/flexible tubing joint is factory-welded; flexible tubing/sanitary tee joint is designed to cut and fit in the field.

Approvals:

- Non-corrugated, flexible PVC tubing
- Manufactured in compliance with ASME A112.18.2-2005/CSA B125.2-2005; and IAPMO PS 69-2006.

Patents (Innovator®):

- U.S. Pat. Numbers 5,890,241; 6,637,050; 6,675,406; 7,127,752; and Patents Pending
- Canadian Patent Number 2.437.448
- Mexican Patent Numbers PA/a/2003007344; PA/a/2005002784; PA/a/2005011301

Patents (WatcoFlex®):


- U.S. Patent Pending
- Mexican Patent Number PA/a/2005011301

Thread Size:


- 11/2" 111/2 NPSM (Coarse Thread)
- 1.865" Major Diameter (outside thread diameter)
- 11.5 threads per inch

Piping: Schedule 40, available only in PVC

ROUGH-IN (RI's) and STOPPER/FACEPLATE (SF's)

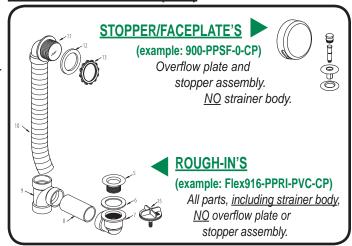


Flex900 Innovator® Parts List

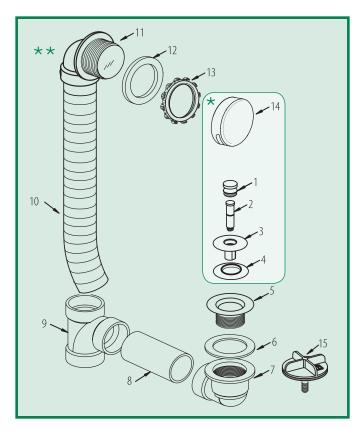

Iter	n Part # Description					
1.	01010CPPUSH PULL® Knob, Brass					
2.	11510Friction Ring and Post (11505 & 11532)					
3.	01013CPStopper, Brass					
4.	11507Seal, 1-1/16" dia.					
5.	01016CPStrainer Body, 1.865" - 11.5 - 1.25"					
6.	10696Drain Ell Washer, 1.5" gray					
7.	14008Drain Ell, Schedule 40, PVC					
8.	SCHPVC-4.625 Pipe, Schedule 40, PVC, 1.5" x 4.625"					
9.	14010Sanitary Tee, Schedule 40, PVC					
10.	(not sold separately)Flex916: Flexible Tubing, 1.5" x 16.0" Flex924: Flexible Tubing, 1.5" x 24.0"					
	#10 FACTORY-WELDED TO #11:					
11.	14020Innovator® Overflow Ell, Schedule 40, PVC					
12.	10675Overflow Ell Washer, Foam					
13.	11121Retainer Nut for Innovator®					
14.	01004CPOverflow Plate for Innovator®					
15.	11575Test Plug with "O"-Ring-type Gasket					
* SF: (example: 900-PP <u>SF</u>) Parts #1 thru #4, and #14						

** RI: (example: FLEX916-PPRI) Parts #5 thru #13 and #15

OPTIONAL TUB CLOSURES FOR FLEX900-SERIES BATH WASTES (PUSH PULL® ALSO SHOWN ABOVE)

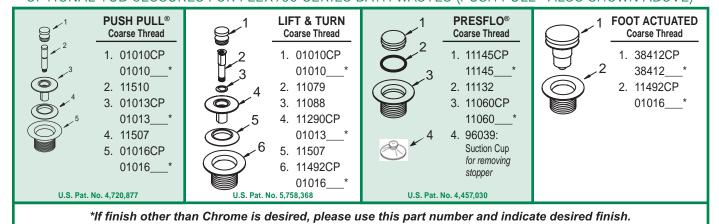

Finishes Available in the FLEX900 Series:

Tub Closures:	PUSH PULL®	LIFT & TURN	PRESFLO®	FOOT ACT.
CP - Chrome Plated	•	•	•	•
AB - Antique Brass				
AP - Aged Pewter	•	•	•	
BB - Brushed Bronze	•	•	•	
BN - Brushed Nickel	•	•	•	•
BO - Bone	•	•		
BS - Biscuit	•	•		
BZ - Oil-Rubbed Bronze	•	•	•	•
CB - Chrome Brushed	•	•	•	
NP - Nickel Polished	•	•	•	•
PB - Polished Brass	•	•	•	•
PN - Pearl Nickel	•	•	•	
WH - White	•	•		
WI - Wrought Iron	•	•	•	